



ESTIMATE

Date	Estimate #
7/7/2020	3818

Customer:
Utilities, Inc. Joey Norman 200 Weathersfield Avenue Altamonte Springs, Florida 32714

Project:
[Empty Project Description Box]

General Contractor: CGC1527276
 Plumbing Contractor: CFC1428400
 Underground Utility Contractor: CUC1224694

Work Order #	Rep

Description
Service to rehab Eagle Ridge LS #3 to include replacing base elbows, base plates, HDPE standpipes, above ground valve assembly, guide rails, guide rail brackets, core wet well lid, tie in to existing force main, paint with two part epoxy. Innovative will pull valve vault lid, drill bottom floor, backfill and pour slab under new above ground assembly. * Includes: - Epoxy Coated Valves & P401 lined pipe and fittings - By-pass pump and call box Labor - \$ 19,665.00 Materials - \$ 19,280.18

	Subtotal	\$38,945.18
	Sales Tax (0.0%)	\$0.00
	Total	\$38,945.18

THIS ESTIMATE IS VALID FOR 30 DAYS

[Handwritten Signature] 7/7/2020



ESTIMATE

Date	Estimate #
7/7/2020	3821

Customer:
 Utilities, Inc.
 Joey Norman
 200 Weathersfield Avenue
 Altamonte Springs, Florida 32714

Project:

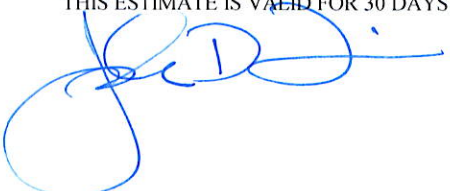
General Contractor: CGC1527276
 Plumbing Contractor: CFC1428400
 Underground Utility Contractor: CUC1224694

Work Order #	Rep

Description
<p>Service to rehab Eagle Ridge LS #8 to include replacing base elbows, base plates, HDPE standpipes, above ground valve assembly, guide rails, guide rail brackets, core wet well lid, tie in to existing force main, paint with two part epoxy. Innovative will pull valve vault lid, drill bottom floor, backfill and pour slab under new above ground assembly.</p> <p>* Includes: - Epoxy Coated Valves & P401 lined pipe and fittings - By-pass pump and call box - No Retainage to be held at the time of invoicing</p> <p>Labor - \$ 19,665.00 Materials - \$ 19,280.18</p>

Subtotal	\$38,945.18
Sales Tax (0.0%)	\$0.00
Total	\$38,945.18

THIS ESTIMATE IS VALID FOR 30 DAYS

 7/7/2020



ECO-2000, Inc.
P.O. Box 2275
Bushnell, FL 33513
Phone #352-793-5060

Estimate

Date	Estimate #
4/3/2020	ECO-3300

Name / Address
Utilities, Inc. of Florida 500 W Monroe St STE 3600 Chicago, IL 60661-3779

Account #
UC101

Description	Qty	Rate	Total
Lift Station Plumbing EAGLE RIDGE LS 3 - Replace 4" Corroded Ductile Iron Force Main Riser with 4" HDPE Pipe - Remove necessary railing and plumbing to: - Dewatering Equipment - Clean Lift Station Manhole with Vac-Truck - Hand Excavate between Lift Station Manhole - Remove and Dispose of Corroded Pipe from Pump Chair to Check Valve in Valve Box - Install new Pump Base Elbow - Install new 4" HDPE Riser - Install new 4" HDPE to Valuing System - Install new Stainless Steel Pipe Supports - Replace all railing and wiring back to original state - Demo Valve Box - Dispose of Concrete - Add Clean, Compacted Fill Dirt up to ground level - Install New 6'x 6'x 6" Concrete Valuing System Pad - Remove and Replace all Ductile Iron Pipe and Fittings in the Valve Box - Test for normal operations - High Pressure Wash inside of the Manhole to remove surface grit, grease and oils - Spray with Cleaner to remove stubborn grit, grease and oils - Confined Space Entry		40,980.00	40,980.00
		Total	\$40,980.00



ECO-2000, Inc.
P.O. Box 2275
Bushnell, FL 33513
Phone #352-793-5060

Estimate

Date	Estimate #
4/3/2020	ECO-3301

Name / Address
Utilities, Inc. of Florida 500 W Monroe St STE 3600 Chicago, IL 60661-3779

Account #
UC101

Description	Qty	Rate	Total
Lift Station Plumbing EAGLE RIDGE LS 8 - Replace 4" Corroded Ductile Iron Force Main Riser with 4" HDPE Pipe - Remove necessary railing and plumbing to: - Dewatering Equipment - Clean Lift Station Manhole with Vac-Truck - Hand Excavate between Lift Station Manhole - Remove and Dispose of Corroded Pipe from Pump Chair to Check Valve in Valve Box - Install new Pump Base Elbow - Install new 4" HDPE Riser - Install new 4" HDPE to Valuing System - Install new Stainless Steel Pipe Supports - Replace all railing and wiring back to original state - Demo Valve Box - Dispose of Concrete - Add Clean, Compacted Fill Dirt up to ground level - Install New 6'x 6'x 6" Concrete Valuing System Pad - Remove and Replace all Ductile Iron Pipe and Fittings in the Valve Box - Test for normal operations - High Pressure Wash inside of the Manhole to remove surface grit, grease and oils - Spray with Cleaner to remove stubborn grit, grease and oils - Confined Space Entry		40,980.00	40,980.00
		Total	\$40,980.00



Florida Utility Solutions Inc.
15275 Collier Blvd. Suite 201-268
Naples, FL 34119
(239) 513-0445
billing@floridautilitysolutions.com

Estimate

ADDRESS

Michael Wilson
Utilities, Inc.
200 Weathersfield Ave.
Altamonte Springs, FL 32714

ESTIMATE # 2279

DATE 04/28/2020

EXPIRATION DATE 06/28/2020

LOCATION

Lift Station #8 Rehab

DATE	ACTIVITY	QTY	RATE	AMOUNT
04/28/2020	Labor Service crew to put lift station on bypass, pump station down. perform confined space entry, plug invert, clean station with vactor truck, remove failed ductile iron discharge pipes, pump bases, and hardware, Install new stainless steel base plates, install new pump bases, install HDPE discharge pipes, 90 degree elbows, short section of HDPE pipe, and switch over to Ductile iron pipe for above ground valve system.	1	7,500.00	7,500.00
04/28/2020	Labor Labor to remove existing valve vault lid, excavate between valve vault and lift station, remove failed valve assembly, fill empty valve vault with dirt, grade, pour 6X6 concrete pad, build above ground valve assembly, tie into force main, and return station to normal operation.	1	7,500.00	7,500.00
04/28/2020	Labor Vactor truck to clean station.	3	250.00	750.00
04/28/2020	Parts 4" flygt pump bases, stainless steel base plates, stainless hardware, 4" HDPE pipe, 2 HDPE companion flanges, 2 HDPE 90 degree elbows, Stainless support brackets, ductile iron pipe, all in ductile, 7 90 degree flanged elbows, 3 1/4 turn plug valves, 2 val-matic check valves, 2 flanged tees, 1 4" companion flange, 1 4" cam lock, and 22 stainless bolt kits.	1	13,280.35	13,280.35

DATE	ACTIVITY	QTY	RATE	AMOUNT
04/28/2020	Contracted Service Diesel bypass pump.	1	700.00	700.00
04/28/2020	Labor Labor to paint above ground piping and fittings with two part epoxy paint.	8	75.00	600.00
04/28/2020	Contracted Service ***Option-Sandblast and coat inside of lift station with Raven epoxy liner to meet Lee County Specs.***	1	9,870.50	9,870.50

Upon acceptance please sign and return.
 Payment must be made in full within 30 days of invoice.

TOTAL

\$40,200.85

Accepted By

Accepted Date



Florida Utility Solutions Inc.
15275 Collier Blvd. Suite 201-268
Naples, FL 34119
(239) 513-0445
billing@floridautilitysolutions.com

Estimate

ADDRESS

Michael Wilson
Utilities, Inc.
200 Weathersfield Ave.
Altamonte Springs, FL 32714

ESTIMATE # 2281

DATE 04/28/2020

EXPIRATION DATE 06/28/2020

LOCATION

Lift Station #3 Rehab

DATE	ACTIVITY	QTY	RATE	AMOUNT
04/28/2020	Labor Service crew to put lift station on bypass, pump station down. perform confined space entry, plug invert, clean station with vactor truck, remove failed ductile iron discharge pipes, pump bases, and hardware, Install new stainless steel base plates, install new pump bases, install HDPE discharge pipes, 90 degree elbows, short section of HDPE pipe, and switch over to Ductile iron pipe for above ground valve system.	1	7,500.00	7,500.00
04/28/2020	Labor Labor to remove existing valve vault lid, excavate between valve vault and lift station, remove failed valve assembly, fill empty valve vault with dirt, grade, pour 6X6 concrete pad, build above ground valve assembly, tie into force main, and return station to normal operation.	1	7,500.00	7,500.00
04/28/2020	Labor Vactor truck to clean station.	3	250.00	750.00
04/28/2020	Parts 4" flygt pump bases, stainless steel base plates, stainless hardware, 4" HDPE pipe, 2 HDPE companion flanges, 2 HDPE 90 degree elbows, Stainless support brackets, ductile iron pipe, all in ductile, 7 90 degree flanged elbows, 3 1/4 turn plug valves, 2 val-matic check valves, 2 flanged tees, 1 4" companion flange, 1 4" cam lock, and 22 stainless bolt kits.	1	13,280.35	13,280.35

DATE	ACTIVITY	QTY	RATE	AMOUNT
04/28/2020	Contracted Service Diesel bypass pump.	1	700.00	700.00
04/28/2020	Labor Labor to paint above ground piping and fittings with two part epoxy paint.	8	75.00	600.00
04/28/2020	Contracted Service ***Option-Sandblast and coat inside of lift station with Raven epoxy liner to meet Lee County Specs.***	1	9,870.50	9,870.50

Upon acceptance please sign and return.
Payment must be made in full within 30 days of invoice.

TOTAL

\$40,200.85

Accepted By

Accepted Date