


Load Management

- Similar to CS series dry contact based load management
 - Supplied wire harness includes serial connections and load management connections
- Perfect for simple integration to building energy management or other load control systems
- Hi/Low – Ground to reduce pilot to 25%
- Hi/Off – Ground to reduce pilot to 0% pilot (Off)
 - Ground Hi/Off and High/Low together = 50% Pilot
- Open Collector output
 - Driven low on contactor closure
 - Driven High 5 seconds after contactor open

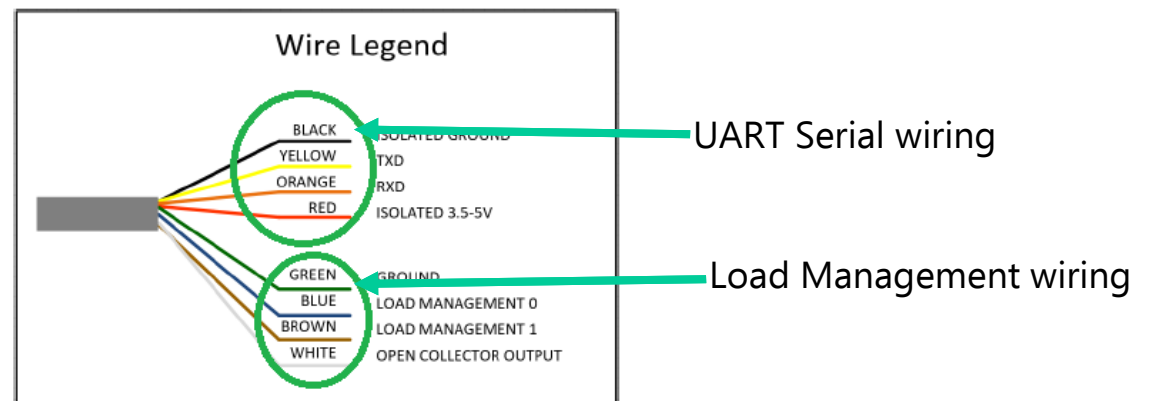

ClipperCreek, Inc