

Quick Charge Station

Overview

- Fast-charge any compatible vehicle
- 0 to 80% in less than 30 minutes
- Multi-standard (DCA - CHAdeMO; DCC - CCS/Combo)
- Color screen (for user interface and publicity)
- Network integration (OCPP or proprietary protocol)
- Built-in communications (3G; LAN; Wi-Fi)
- Optional 2 piece configuration (kiosk/terminal)



Fast Charging



User Friendly



Communication & Management



Multi-standard

DC plug-in charging systems



CCS



CHAdeMO

Product description

The Efacec EV DC Quick Charger can be used to charge all EVs with CHAdeMO and CCS charging standard compliance.

The DC Quick Charger is a user-friendly and safe process to fast charge your vehicle. After user identification (if authentication is required), by simply choosing the charging standard compatible to your vehicle and coupling the charger's output plug to the EV, you will have a fast secured and proven charging process. The battery charging status is displayed and the charging cycle finishes by itself or can be terminated by an user command.

Different output options are available, like the basic single DC output, dual DC output, in a single cabinet or bundled with a wired charging interface kiosk.


The DC Quick Charger includes Efacec's power electronics unique design, resulting in top specifications for DC fast charging. Higher power output with best power factor and efficiency.

Main features

- Multiple standards
- Multiple outputs
- DC up to 50 kW
- High efficiency: > 93%
- High power factor: 0.98
- Simple plug & play installation
- Standalone or network integrated charger
- Local and remote monitoring and control
- Customized personalization

Technical data	ETL
Nominal Input	
Phases / lines	3 phases + PE
Voltage & frequency	480 Vac ± 10 %; 60 Hz
Nominal input current & power	64 A, 50 kVA
Efficiency	> 93 %
Power factor	0,98
AC Nominal Input (Optional)	
NOT AVAILABLE	
DC Output	
Voltage	50 Vdc to 500 Vdc
Current	0 to 120 A
Nominal Power (@ 400V)	45 kW continuous / 50 kW peak
AC Output (optional)	
NOT AVAILABLE	
General Specifications	
Equipment	Multi-standard DC outputs (Mode-4)
Communication with EV	JEVS G104 (CHAdeMO) IEC61851-23 PLC (SAE / Type-1)
DC Plugs	JEVS G105 (CHAdeMO) Combo T2 (SAE / Type-1)
Human Machine Interface	By default 6.4" TFT Color screen Mifare (Classic, DesFire EV1) or others on request
Display	
RFID system	
Communication	3G (GSM or CDMA) LAN Wi-Fi
Communication Protocols	OCPP (1.2; 1.5) and others
Place of installation	Indoor/Outdoor
Altitude	Up to 1000 m
Protection degree	IP54 IK10 NEMA 3R
Operating Temperature	-13 °F to +122 °F
Optional Cold Option	-31 °F to 122 °F
Storage Temperature	-40 to +140 °F
Humidity	5 % to 95 %
Sound noise	<55 dB in all directions
Dimensions (W x D x H)	23.6 x 23.6 x 70.9 inches
Weight	1323 pounds

Configurations

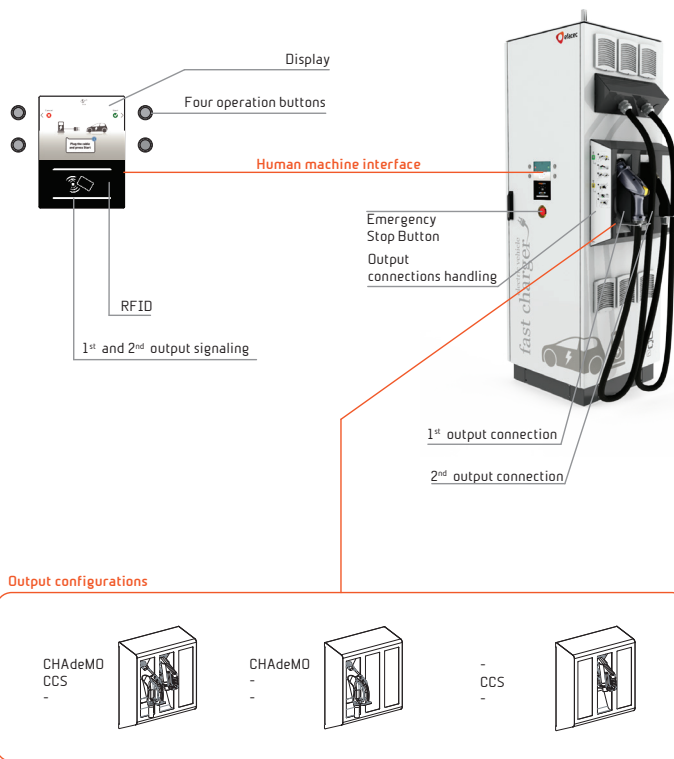

Applications

- Highways and national roads
- Fuel-stations (City and strategic locations)
- EV Infrastructure and operators
- EV fleet (private and public)
- EV dealers and service providers



Main Office:

160186-Staff-POD-9-99

policy of continuous development, specifications may change without notice. Not valid as a contractual item.