




NOVACHARGER 5000 FAMILY OF CHARGING STATIONS

High Quality Meets Affordability.

Introducing the NovaCharger NC-5000 family of commercial charging stations. Built for heavy usage, NC-5000 products are reliable, tamper-proof, and perfect for all weather environments. The NC-5000 series boasts a sophisticated, compact design, and offers the option of an 18' cord (NC-5018) or a 25' cord (NC-5025). These high performance stations rival competitive models, at a fraction of the cost. NC-5000 chargers also feature a customizable front panel enabling businesses to showcase their brand to its customers and employees, and promote their commitment to environmental sustainability.

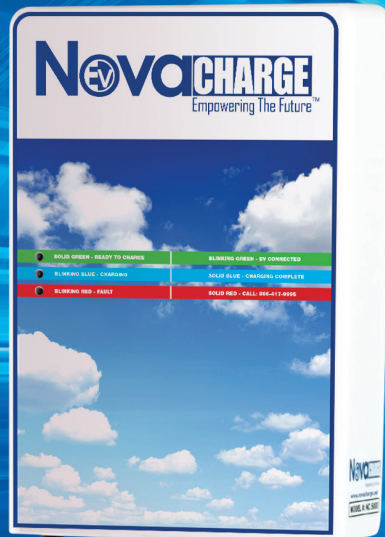



Easy to Read Indicator Lights

LED STATE	MEANING
• Steady Green	Ready to charge
• Slow Blinking Green	EV connected
• Blinking Blue	Charging
• Steady Blue	Charging Complete
• Slow Blinking	Red Fault
• Steady Red	Fatal error, contact service personnel

Fully Customizable Front Panel

- Showcase corporate brand or advertising message to customers and employees
- Promotes commitment to environmental sustainability
- Perfect for workplace EV charging initiatives as employee benefit

The NC-5000's Compact Design boasts a variety of features:

- Rugged, all weather housing
- Will not rust or overheat
- No exposed screws or attachments
- Tamper proof design
- Available in wall-mount and pole mount configurations
- Optional pedestal stand available with single port or dual port capabilities.
- Common backplate design for easy installation

Cord, Holster & Charging Gun:

- User friendly - Easy to operate
- Standard 18' (NC-5018) or 25' (NC-5025) cords can accommodate all parking configurations
- Durable, hardened rubber charging gun
- Weatherproof – will not crack due to sun exposure

PRODUCT SPECIFICATIONS

Charging Connector:	SAE J1772 coupler
Input Power:	208/240 VAC Single Phase 32A
Frequency:	60Hz
Output Power:	7.2KW
Dimensions:	15.0" L x 10.6" W x 4.7" D
Weight:	17.6 lb
Operating Temperature:	-22°F ~ 122°F (-30°C ~ 50°C)
Humidity:	95% RH non-condensing
Enclosure Rating:	Type 3R per UL 50E
Safety Compliance:	UL/cUL
Protection:	Overload & Ground Fault Detection
Cable Entry:	Back/Bottom

NC-5000 LIMITED WARRANTY

NovaCharge warrants that this product shall be free of defects in materials and workmanship under normal use for a period of three (3) years from the date of delivery. For complete warranty information, please contact NovaCharge at info@NovaCharge.net.



172A State Street E., Oldsmar FL 34677
 US Toll Free: (866) 417-9995 • 1 (813) 333-1119
 Fax: (813) 569-0716

www.novacharge.net

© NovaCharge 2015 - All Rights Reserved